


CYLINDER INFORMATION:

1. BORE = 4 1/2" DIA
2. ROD = 3 1/2" DIA
3. STROKE = 11 1/4"
4. MAX. WORKING PRESSURE: 2500 PSI
5. PORTS = 1/4" NPT
6. PUSH @ 2500 PSI = 39,760 LBS
7. PULL @ 2500 PSI = 22,088 LBS

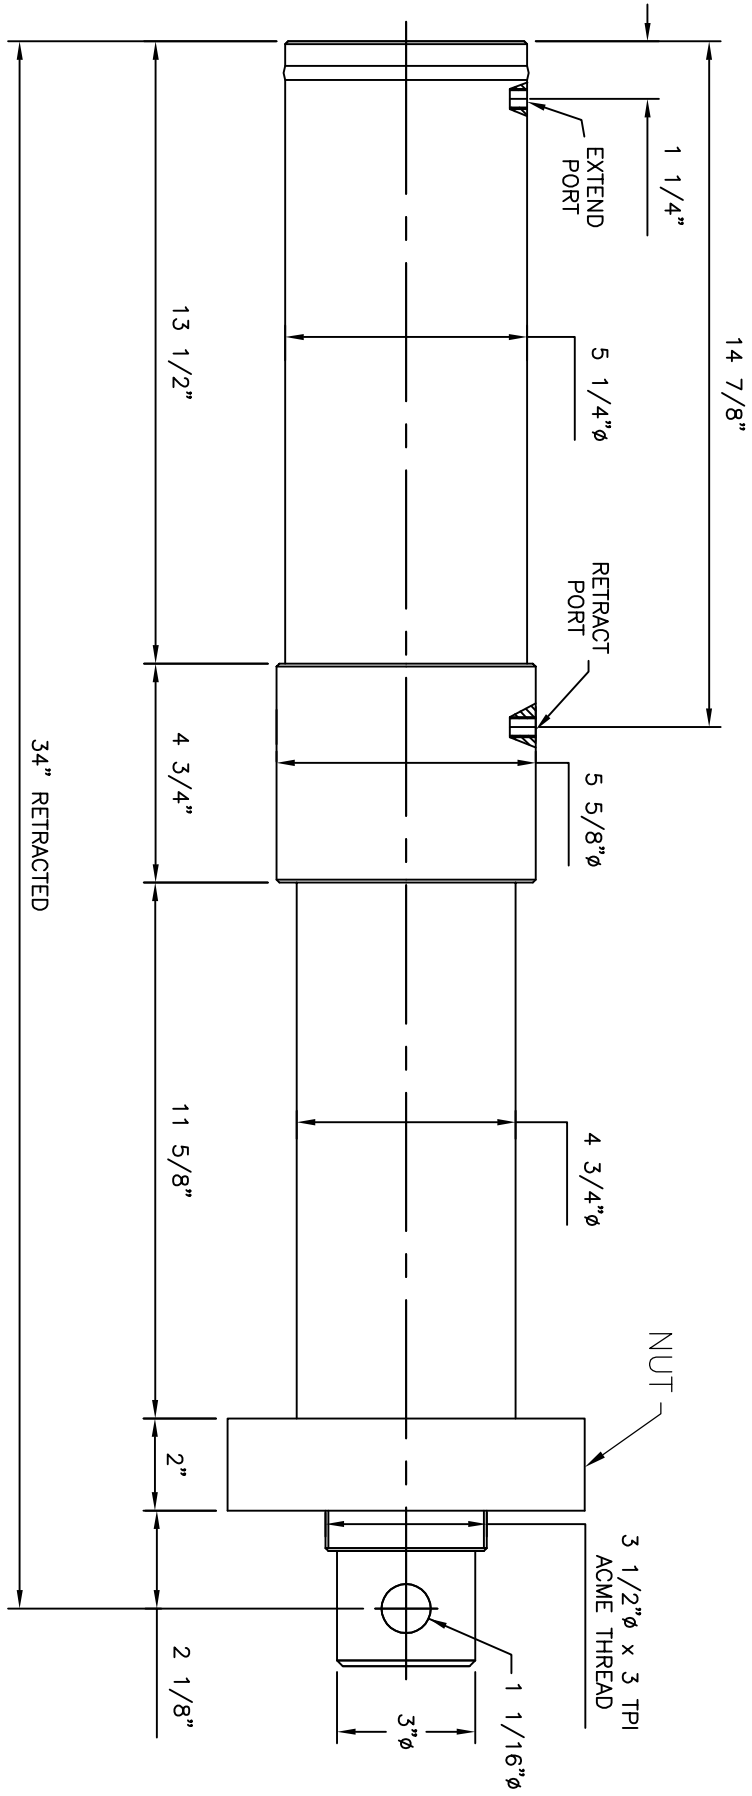

45 1/4" EXTENDED

34" RETRACTED

JACK WITHOUT SLEEVE


SJ500 LEVELLING JACK

CUSTOMER: STOCK	DWG.# SJ-500-REF
CUSTOMER P.O.# STOCK	QTY:
CUSTOMER PART# STOCK	DWN BY: D.J.O.
W.O.# STOCK	SCALE: N.T.S.
	DATE RE: JULY 19/00

UNLESS OTHERWISE NOTED TOLERANCES TO BE:

- .X = ±.030
- .XX = ±.010
- .XXX = ±.002
- X° = ±2°
- X = ±1/16

This drawing and the design shown therein is property of RHK HYDRAULICS INC. and use or copies thereof can not be made without written authorization.



**RHK**  
Hydraulic Services  
MANUFACTURING

11619 145 STREET  
EDMONTON, AB  
T5M 1V9  
PH:(780)414-6410  
FAX:(780)451-4664  
rhkhs@telusplanet.net  
www.rhkhydraulics.com