



CYLINDER INFORMATION:

1. BORE = 5" DIA
2. ROD = 3 7/8" DIA
3. STROKE = 9 13/16"
4. MAX. WORKING PRESSURE: 2500 PSI
5. PORTS = 1/4" NPT
6. PUSH @ 2500 PSI = 49,087 LBS
7. PULL @ 2500 PSI = 19,601 LBS

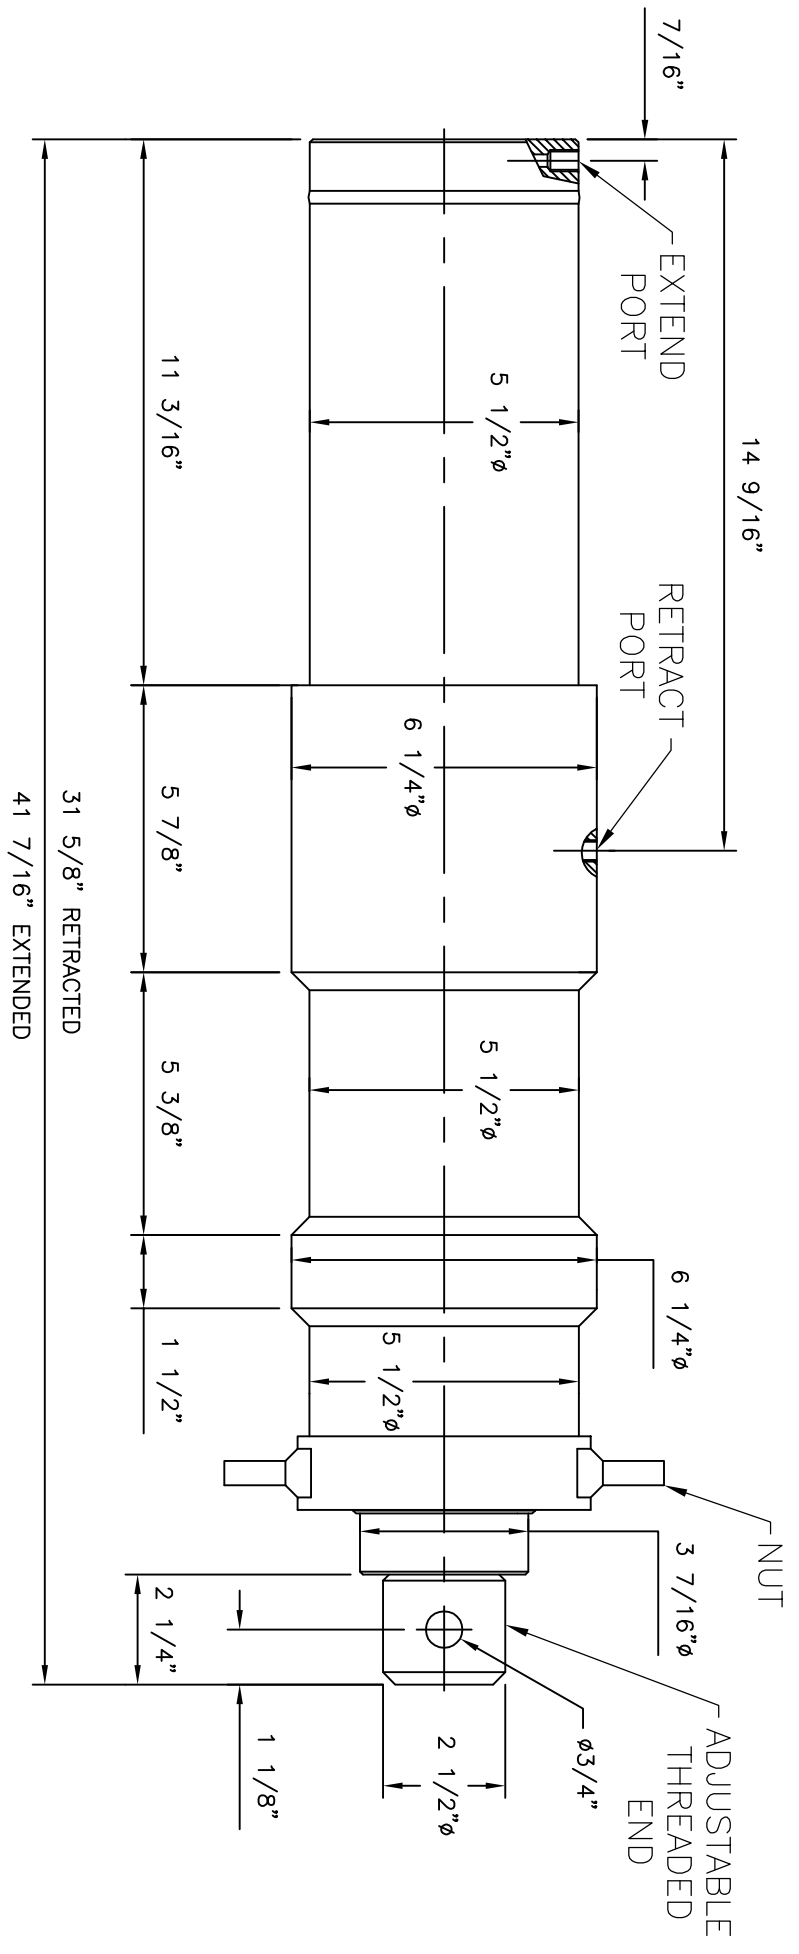

JACK WITHOUT SLEEVE



RHK
 Hydraulic Services
 MANUFACTURING

11619 145 STREET
 EDMONTON, AB
 T5M 1V9
 PH(780)414-6410
 FAX(780)451-4664
 rhkncs@telusplanet.net
 www.rhkhydraulics.com

This drawing and the design shown therein is property of RHK HYDRAULICS INC. and use or copies thereof can not be made without written authorization.

UNLESS OTHERWISE NOTED TOLERANCES TO BE:

- .X = ±.030
- .XX = ±.010
- .XXX = ±.002
- X° = ±2°
- X = ±1/16

SJ600 LEVELLING JACK

CUSTOMER: STOCK	DWG.# SJ-600-REF
CUSTOMER P.O.# STOCK	QTY:
CUSTOMER PART# STOCK	DWN BY: D.J.O.
W.O.# STOCK	SCALE: N.T.S.
	DATE RE: JULY 20/00